



# Anywhere, anytime

## Philips IntelliVue MP2 patient monitor

Philips IntelliVue MP2 patient monitor is intuitive, tough, and packed with features. It delivers IntelliVue monitoring power and functionality in a compact and rugged housing to match the demands of a wide range of out-of-hospital environments. The IntelliVue MP2 offers a long battery run time, along with best-in-class measurements and the ease of use necessary to let users keep their focus where it matters most: providing care to the patient.

### Key advantages

- Small, light, and easy to use, with robust performance in tough conditions
- Clinical Decision Support tools help you to respond quickly in challenging circumstances
- Best-in-class measurements and flexible measurement configurations

**PHILIPS**  
sense and simplicity

# Small only in size

## World-class technology that fits anywhere

Small in size and big in capability, it's a very simple way to monitor a patient during transport. A single step allows you to unplug and go, helping you to evaluate, diagnose, and treat patients in need in difficult environments.

## Approved for aeromedical use<sup>1</sup>

The MP2 offers rugged performance that meets critical transport requirements in adverse circumstances.

## Hospital-quality applications for use in the field

The flexible touchscreen display is configurable to your environment and can present up to 3 waveforms on a crisp and colorful 3.5" QVGA display. We've redesigned the user interface to improve visibility of patient data, make it easier to use, and to enhance compatibility with standard software.

IntelliVue MP2 is available with a wide range of clinical measurements, including 12-lead ECG (both conventional and with the EASI method), multi-lead arrhythmia and ST segment analysis, mainstream or sidestream CO<sub>2</sub>, FAST-SpO<sub>2</sub>, invasive pressure, and temperature.

Each NBP measurement now generates a column in the vital signs trend table. Measurements for other values are added to provide a comprehensive vital signs data set for the NBP measurement time, offering a more complete picture.

The Smart Alarm Delay algorithm helps reduce the number of pulse oximetry nuisance alarms, allowing you to focus your attention where needed.<sup>2</sup>

The MP2 can transfer data seamlessly throughout the continuum of care.

Within the hospital environment the MP2 connects to the Philips IntelliVue Information Center for wired or wireless networked central surveillance and clinical decision support.



Built to perform under harsh conditions, the MP2 is compliant with out-of-hospital transport standards for both land and air transport.<sup>1</sup>



Strong on performance and light in weight, the IntelliVue MP2 is an excellent choice for monitoring patients during transport.


# Clearer decisions in tough situations

**Seamless wired and wireless performance** with easy switching between modes.

**Comfortable handle** for easy transport.

**Night Vision Goggle (NVG) Display Filter** enables use of Night Vision Goggles for night time flying.<sup>3</sup>

**Lightweight.** The basic monitor weighs just 1.5 kg (3.3 lbs.) and is small enough to take anywhere.

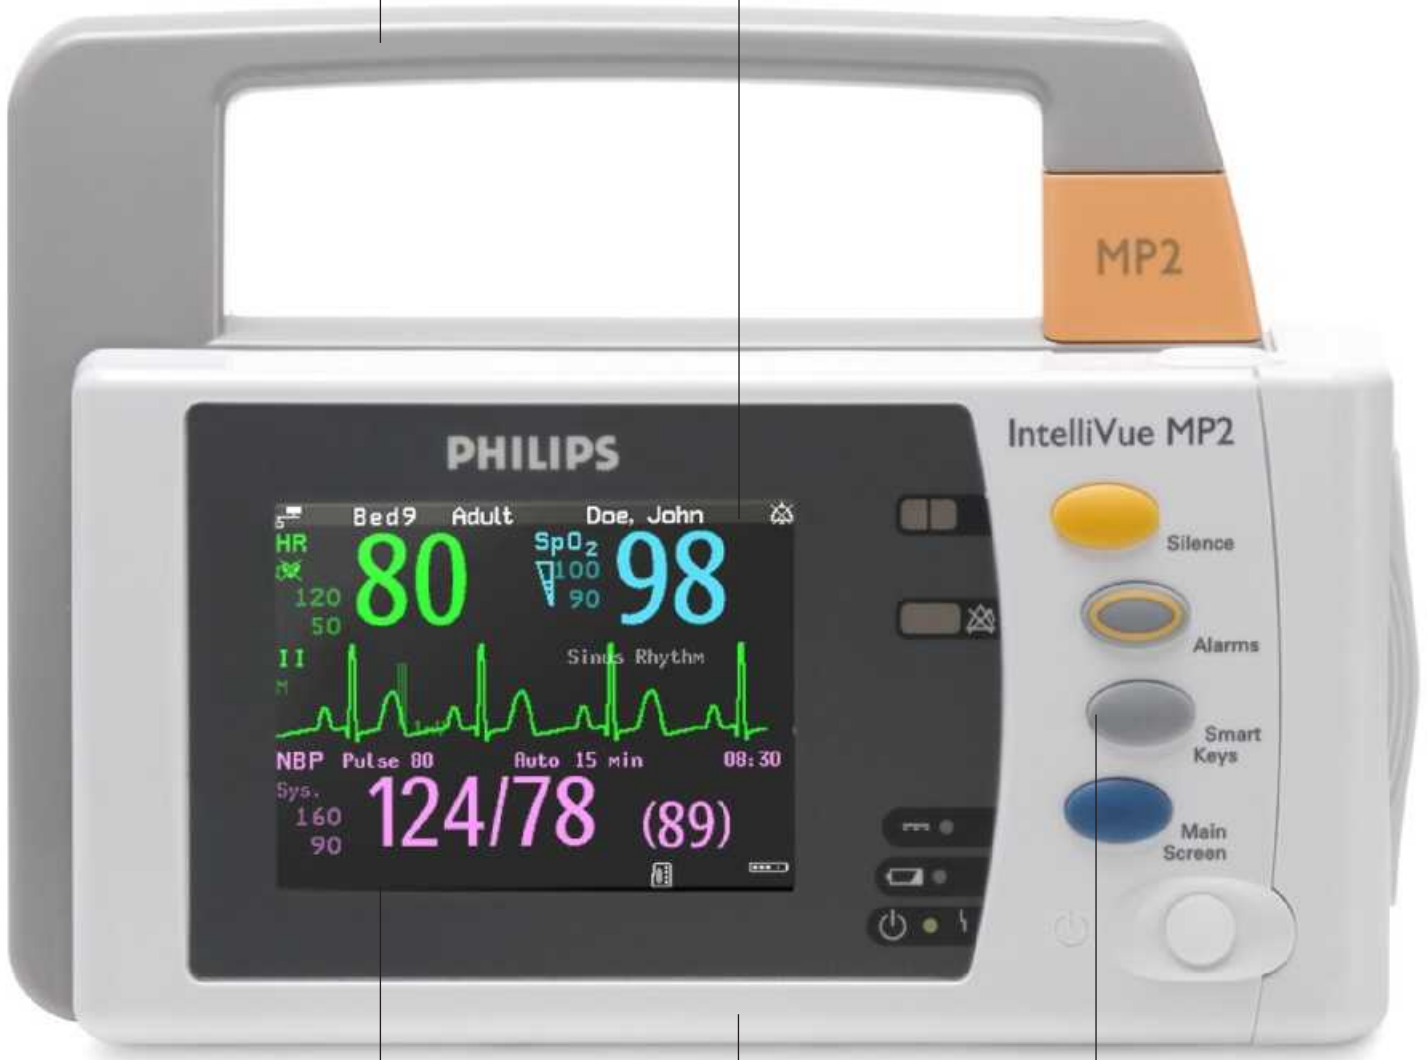

*Photo near actual size*

**Outdoor profile** so the monitor can be used in bright sunlight and areas with higher ambient noise.

**Crisp and colorful touchscreen display** designed for easy information input and intuitive onscreen navigation.

**Sturdy housing** (Class 7M3) to withstand rough handling.

**Long battery run time** of up to 3 hours.<sup>4</sup>

**Configurable Smart Keys**

# All you need



<sup>1</sup> The MP2 patient monitor with ECG/Resp, NBP, SpO<sub>2</sub>, Pressure, Temp, CO<sub>2</sub> (only Mainstream Sensor M2501A), LAN and battery can be used in a transport environment such as road ambulance, airplane or helicopter. U.S. Army Airworthiness Certification and Evaluation (ACE) program of the U.S. Army Aeromedical Research Laboratory (USAARL). Tests performed in accordance with the following standards: MIL-STD-461E, MIL-STD-810F, MIL-STD-1472F, ANSI/AAMI HE48-1993 HF, ANSI/AAMI ES1. EMC and environmental requirements may vary from country to country according to local regulatory standards and directives. Contact your Philips representative for more information.

<sup>2</sup> Not available in the U.S.  
<sup>3</sup> The Night Vision Goggle (NVG) Display Filter controls the color, brightness, and night vision radiance of incandescent, LED, fluorescent, and other light sources.  
<sup>4</sup> Three-hour battery run time based on these conditions: basic monitoring, one new battery, automatic brightness reduction, ECG/RESP and SpO<sub>2</sub> in use, NBP every 15 minutes. Battery charge time is approximately 2 hours when monitor is switched off and approximately 12 hours when monitor is in use.

The MP2 is lightweight, yet rugged and is designed for reliable performance in demanding situations.



M8102A MP2

A range of mounting solutions for easy access and mobility.



Compatible with the Philips IntelliVue XDS Large Display giving you the flexibility of adding a high-resolution larger display making it even easier to clearly see vital patient information.



Philips offers a wide range of supplies, including carrying cases, non-slip pads, NIBP cuffs, SpO<sub>2</sub> sensors, and a variety of cables and leads to optimize performance of your Philips equipment.

[asimpleswitch.com](http://asimpleswitch.com)

Please visit [www.philips.com/IntelliVueMP2](http://www.philips.com/IntelliVueMP2)



© 2010 Koninklijke Philips Electronics N.V.  
All rights are reserved.

Philips Healthcare reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Philips Healthcare is part of Royal Philips Electronics

[www.philips.com/healthcare](http://www.philips.com/healthcare)  
[healthcare@philips.com](mailto:healthcare@philips.com)

Printed in The Netherlands  
4522 962 63931 \*AUG 2010